

Unique Industry




UN_0845 (1+1)

Table of Contents

1. Product Description	2
2. Specifications	3
3. Technical Designs	4
4. Dimensions of cabinet	5
5. Advantages	6
6. 3D Views	7
7. Project with 8 platforms in line	8

1. Product Description

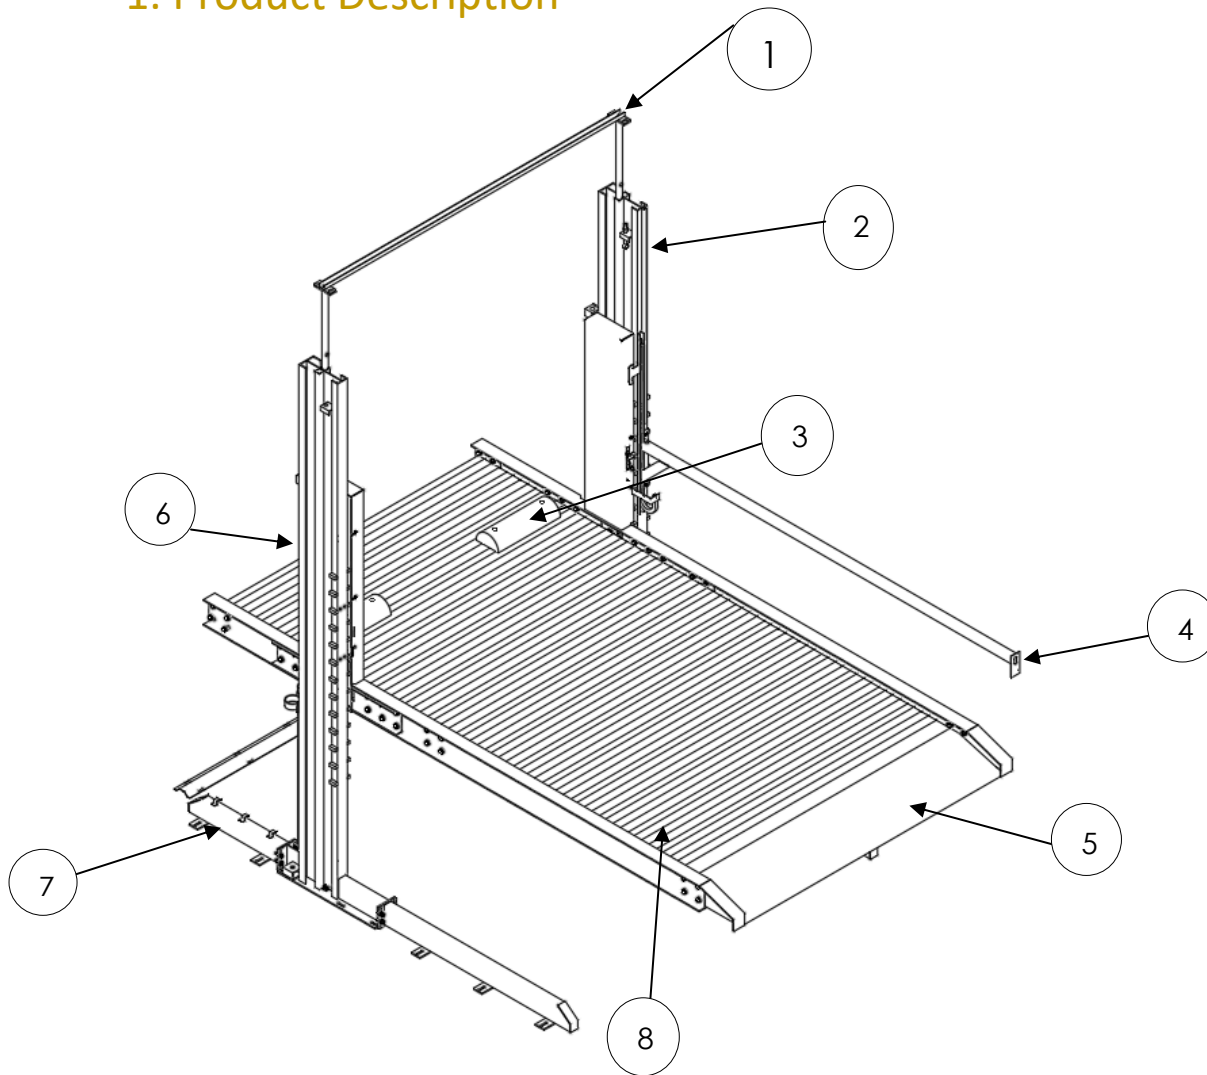

Description

1. Guide (column) connection
2. Column
3. Car wheel stopper
4. Controller
5. Ramp
6. Telescopic hydraulic cylinder
7. Rubber hole
8. Galvanized floor

2. Specifications



Model	UN_0845 (1+1)
Loading capacity	2500kg
Platform dimension (clear)*	W2060 x D4280mm
External platform dimension	W2650 x D4550mm
Power supply	220V,3 phase
Lock device	Dynamic
Lock release	Electric Auto Release
Operation	Key switch
Floor	Galvanized
Color of machine**	Ral 7040 (for indoor use)
Basement height	Suitable for basements
Legislation & Standards	Examination Certificate Machinery Directive 2006/42/EC

Upon Request




* The width of platform can be extended up to 500mm (100mm at a time).

** The machine can be galvanized for outdoor use.

3. Technical Designs

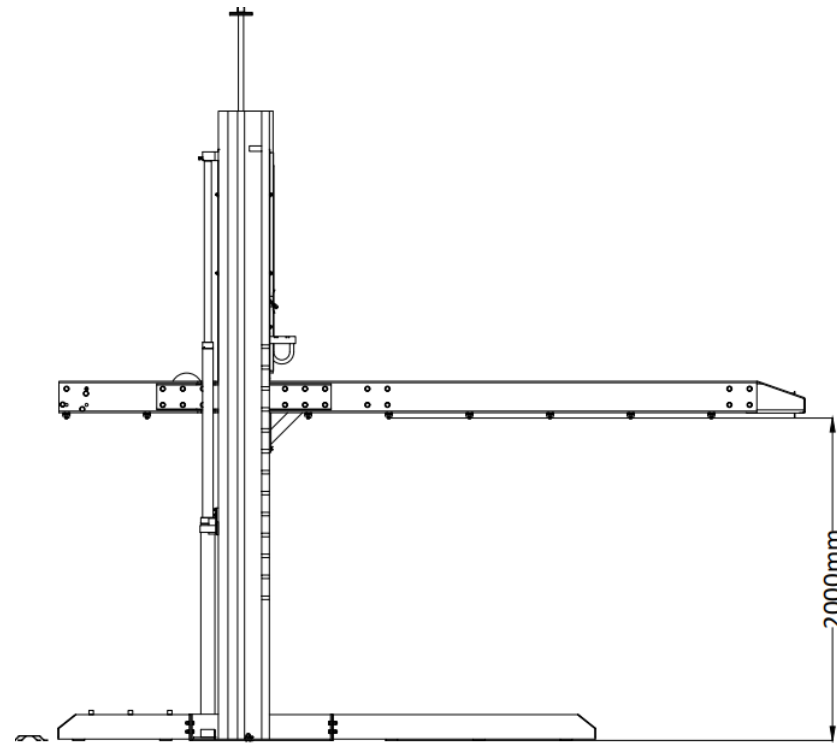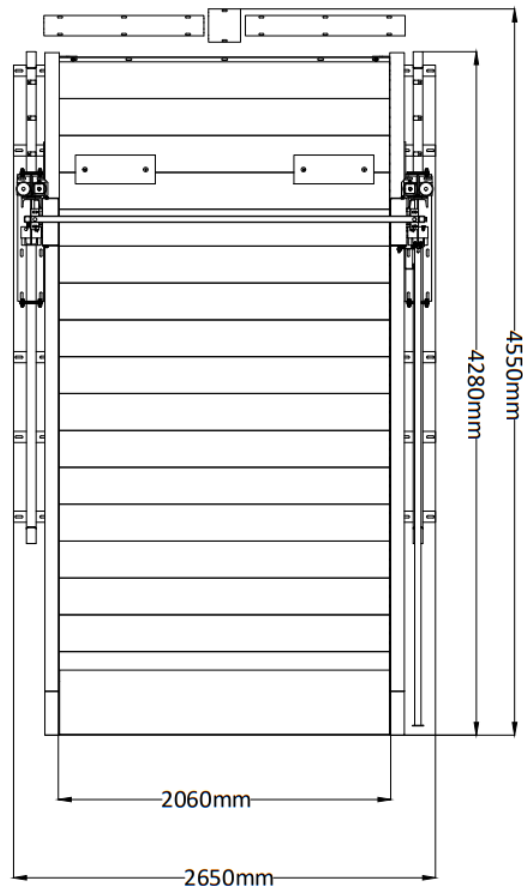

4.Dimensions of cabinet

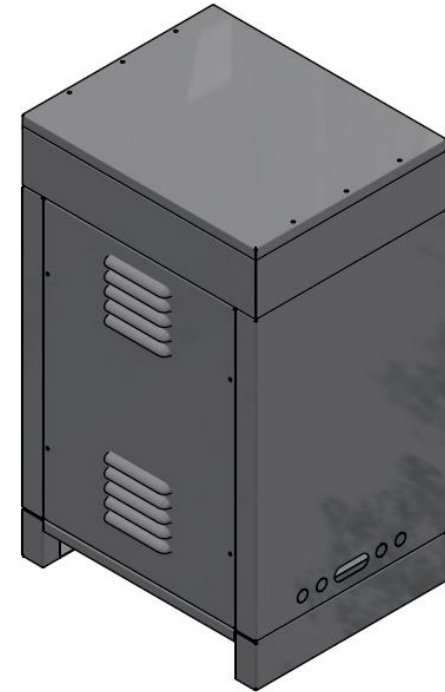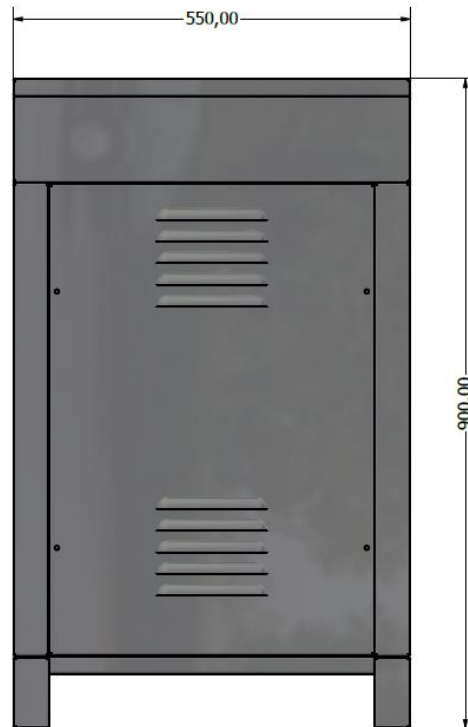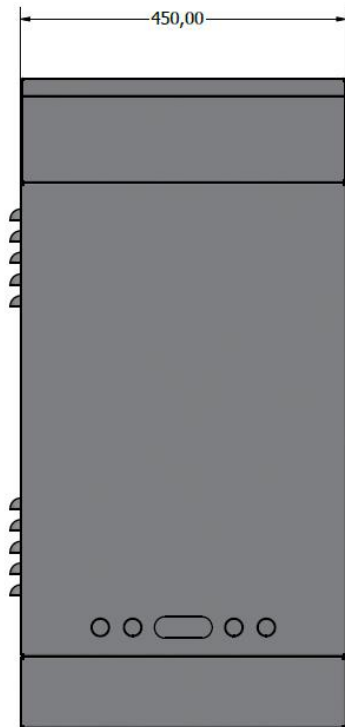

*The cabinet is optional.

5.Advantages

- It is the simplest form of parking system since it requires no preparation in the surrounding area.
- It does not require the construction of a shaft.
- It is available for indoor or outdoor use.
- Suitable for different vehicle's height and building available height.
- Easy installation.
- Low usage cost.
- Dynamic locking device.
- Can be relocated.
- Platform can stop at different heights.
- Hydraulic overload protection.
- CE Marking.

Lifting capacity: 2500 kg

Operation: Continuous pressure control

6. 3D Views



7. Project with 8 platforms in line

