



2021

COLUMN FOR PEOPLE WITH DISABILITIES-0872

UNIQUE INDUSTRY




Contents

1. Product Description.....	2
2. Technical Information.....	3
3. Safety Features.....	4
4. Additional Features	4
5. Detailed Top Views	5
5.1 Entrance – Exit, Opposite Side.....	5
5.1.1 Standard Dimensions.....	5
5.1.2 Min - Max Dimensions.....	6
5.2 Entrance – Exit, Same Side	7
5.2.1 Standard Dimensions.....	7
5.2.2 Min - Max Dimensions.....	8
5.3 Entrance – Exit, 90°	9
5.3.1 Standard Dimensions.....	9
5.3.2 Min - Max Dimensions.....	10

1. Product Description

No	Type
1	Aluminium Column
2	Control Panel
3	One-sided Door
4	Aluminium Frame
5	Two-sided Door
6	Roof with polycarbonate

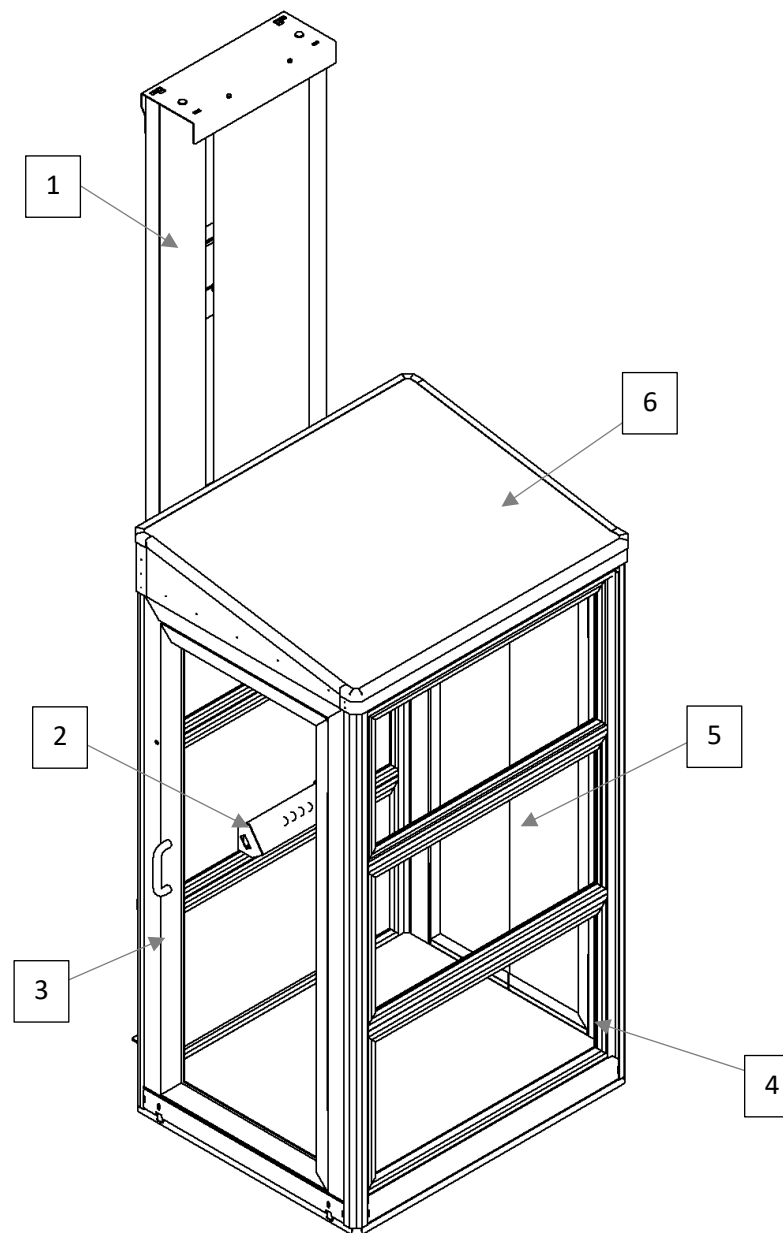

2. Technical Information

Loading capacity	Max 420 Kg
Platform dimensions	Min Width 900 x Depth 800 mm Max Width 1100 x Depth 1500 mm
Max Travel	10000 mm
Stops	5
Motor	2 Hp / 220 V
Travel speed	0.08 – 0.10 m/sec
Pit depth	140 mm
Minimum headroom	2500
Columns	Aluminium
Diameter of the hydraulic cylinder	Ø 70x80
Metallic chain	BL 434
Legislation and standards	Good
Standard Finish *	RAL 1013, RAL 9016, RAL 7040, RAL 7016

3. Safety Features

- * Overpressure valve
- * Battery operated evacuation system (power failure evacuation)
- * Alarm
- * Hold to run buttons
- * Electromechanical locks

4. Additional Features



- * Cabinet for power unit and control panel
- * Oil heater
- * Galvanized construction (outside use)
- * Additional triangle support
- * Colors can be customized to your taste

UN_872

5. Detailed Top Views


5.1 Entrance – Exit, Opposite Side

5.1.1 Standard Dimensions

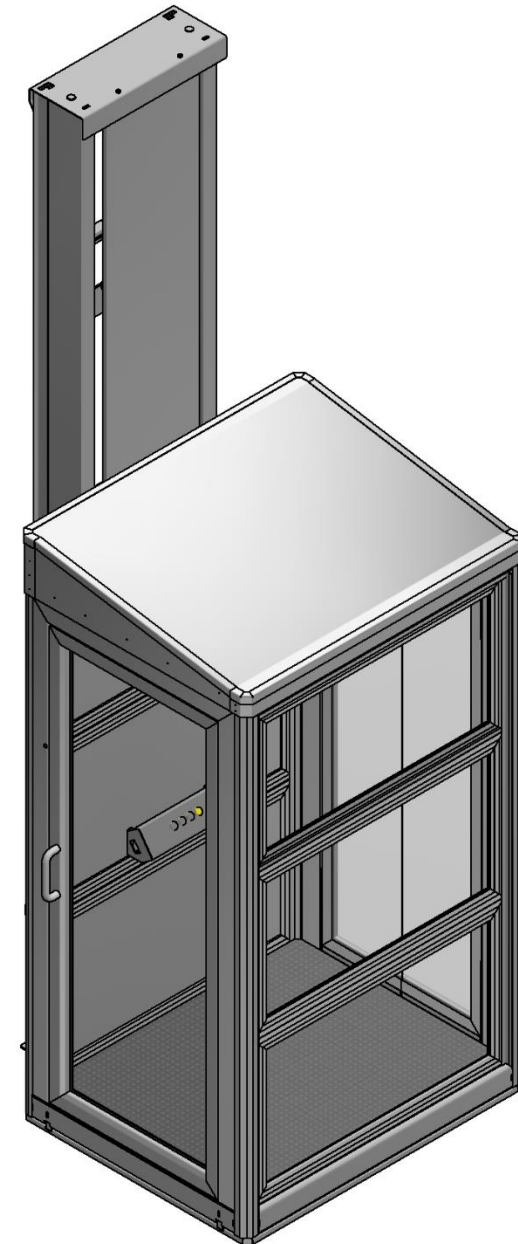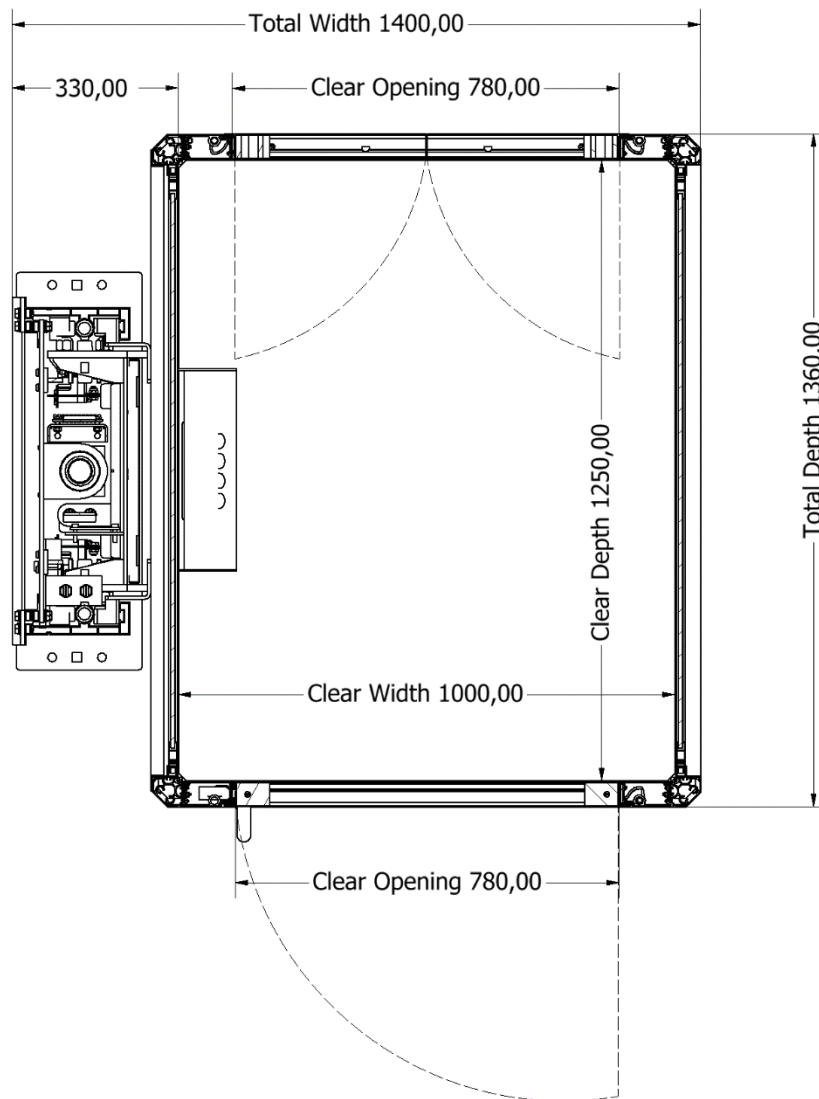

Technical drawing of a rectangular enclosure with the following dimensions and features:



- Total Width:** 1300,00
- Clear Opening (Top):** 680,00
- Clear Depth:** 800,00
- Clear Width:** 900,00
- Clear Opening (Bottom):** 680,00
- Total Depth:** 910,00
- Left Side Detail:** A detailed view of the left side of the enclosure, showing internal components and a height of 50,00.
- Doors:**
 - 2 - SIDED DOOR:** Indicated by a dashed line and an arrow pointing to the top edge of the enclosure.
 - 1 - SIDED DOOR:** Indicated by a dashed line and an arrow pointing to the bottom edge of the enclosure.

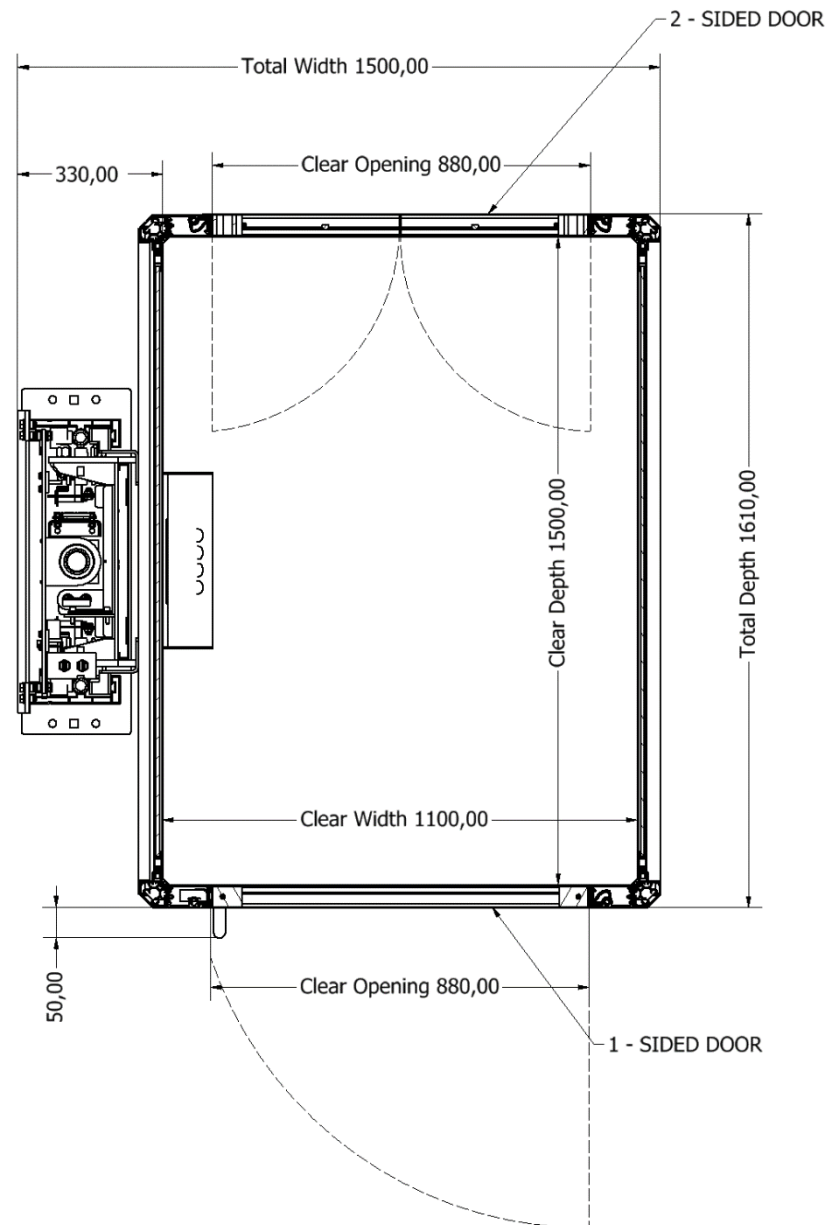

UN_872



5.2 Entrance – Exit, Same Side

5.2.1 Standard Dimensions

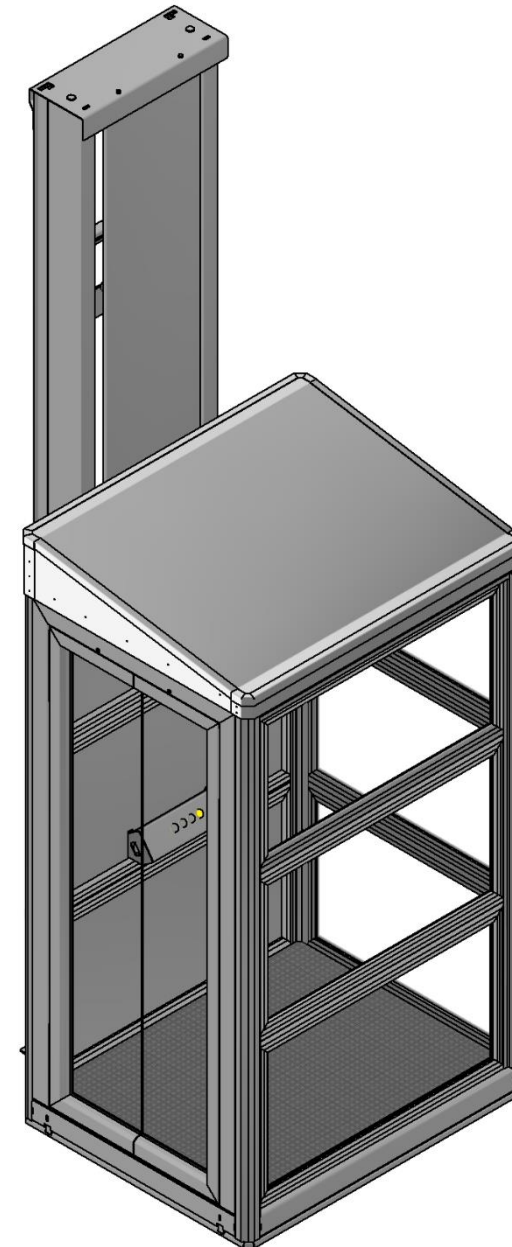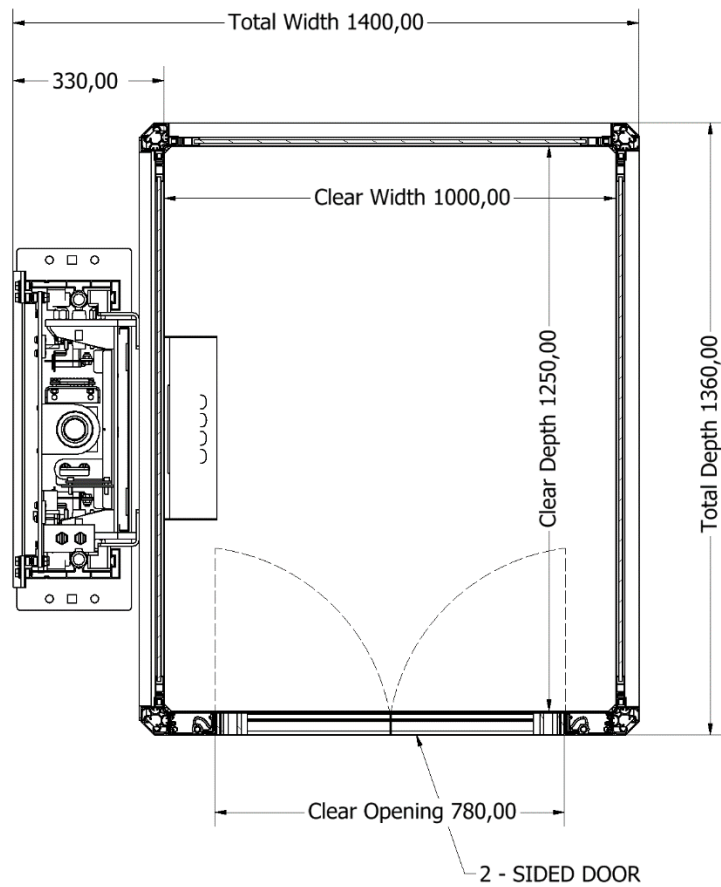

UN_872



5.2.2 Min - Max Dimensions

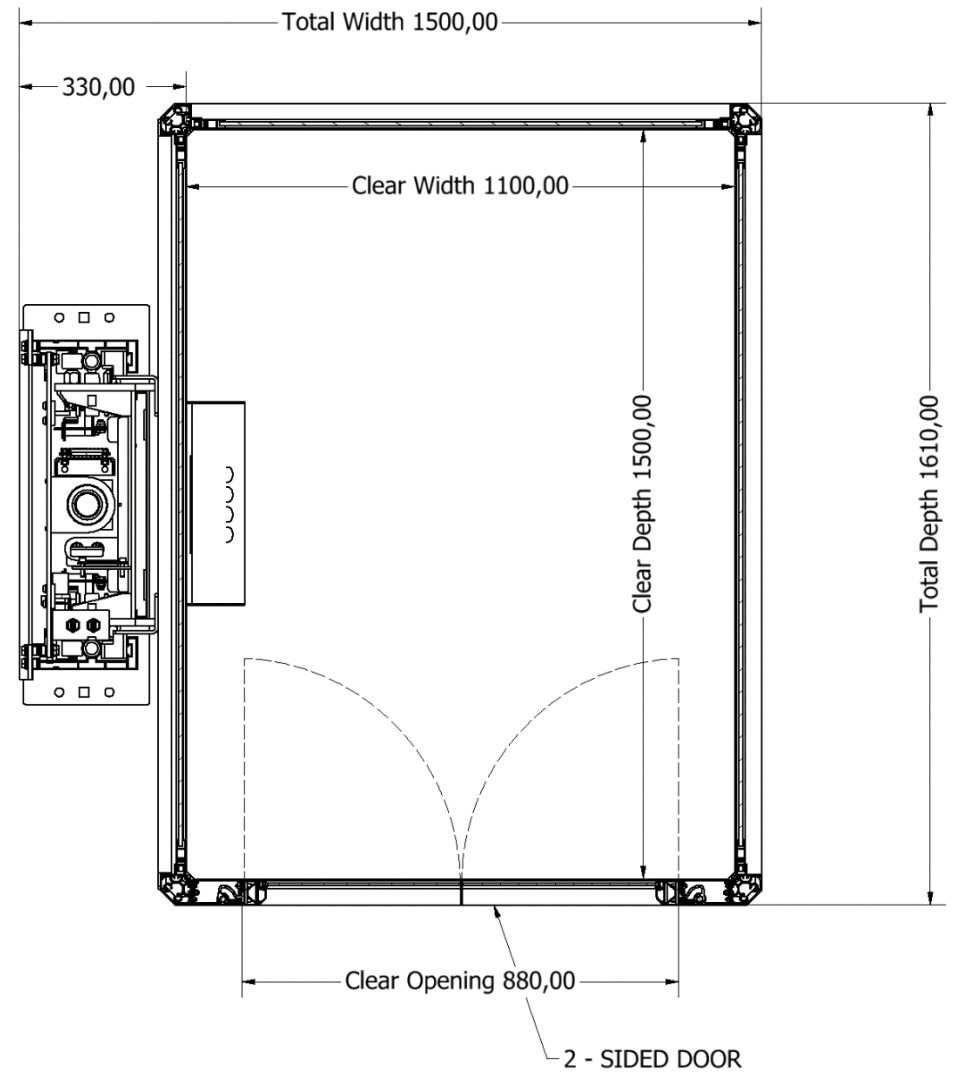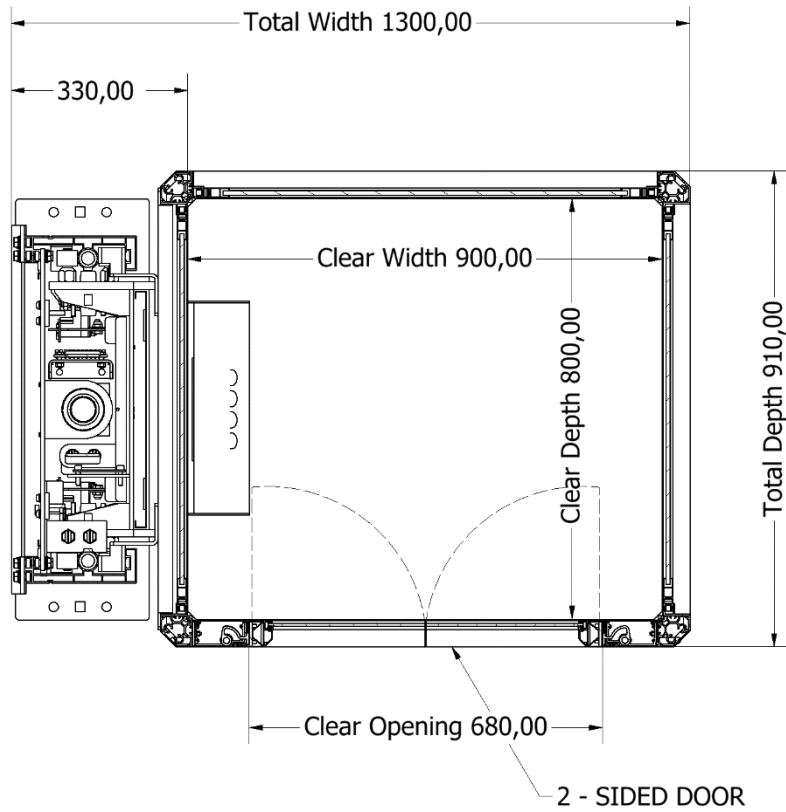

UN_872

5.3 Entrance – Exit, 90°

5.3.1 Standard Dimensions

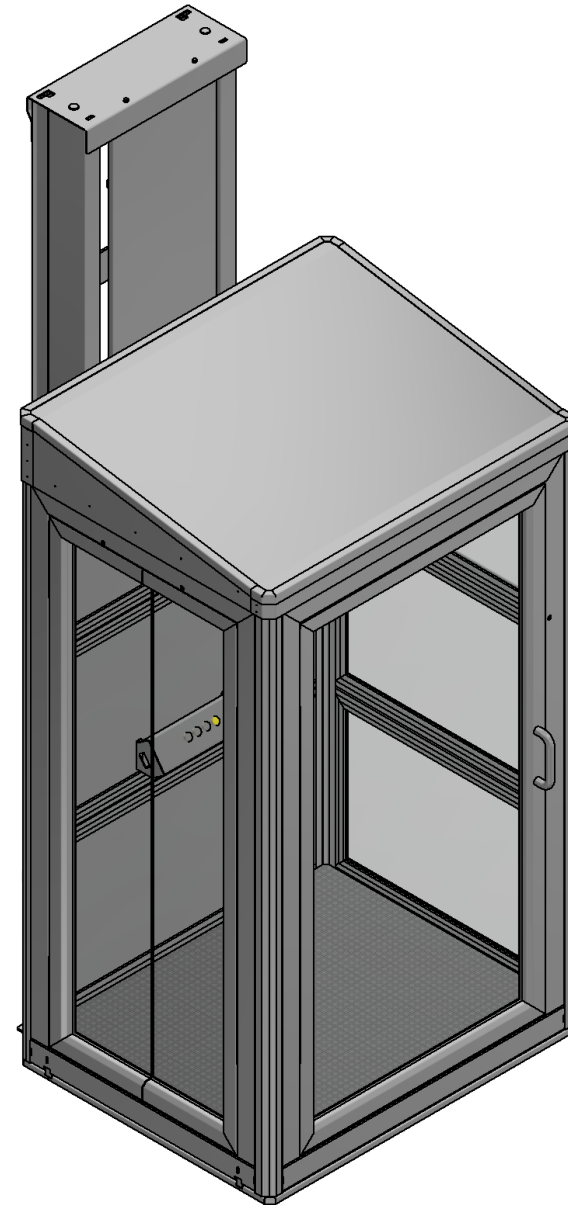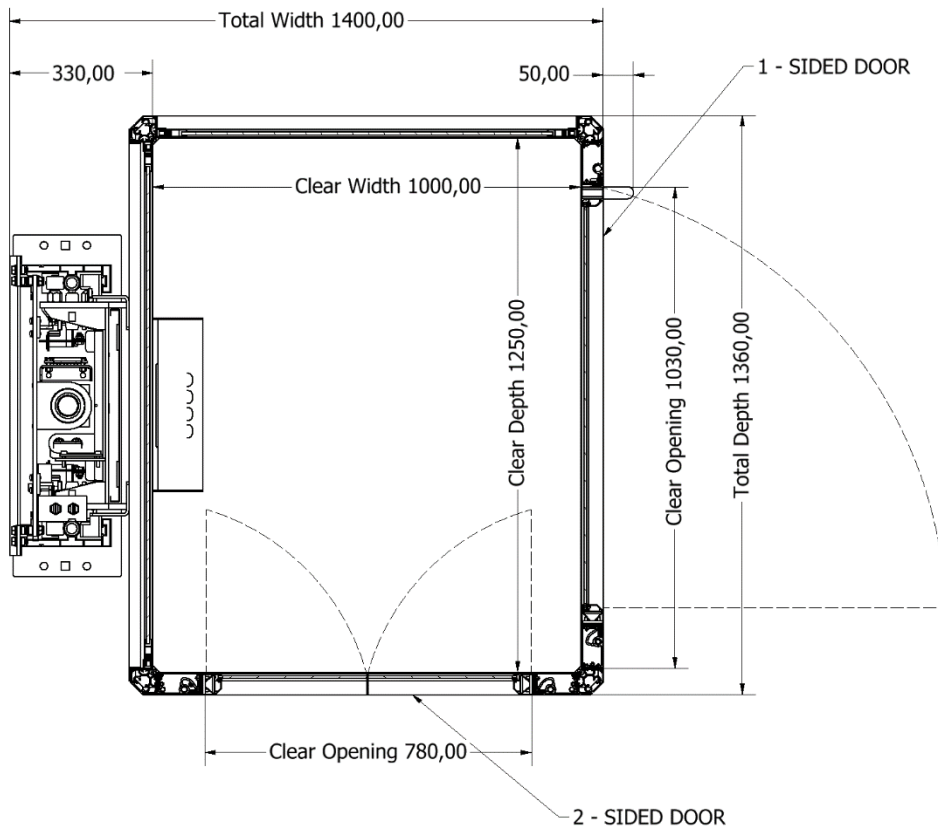

UN_872

5.3.2 Min - Max Dimensions

